




REVO 66

CONTACT CLEANER

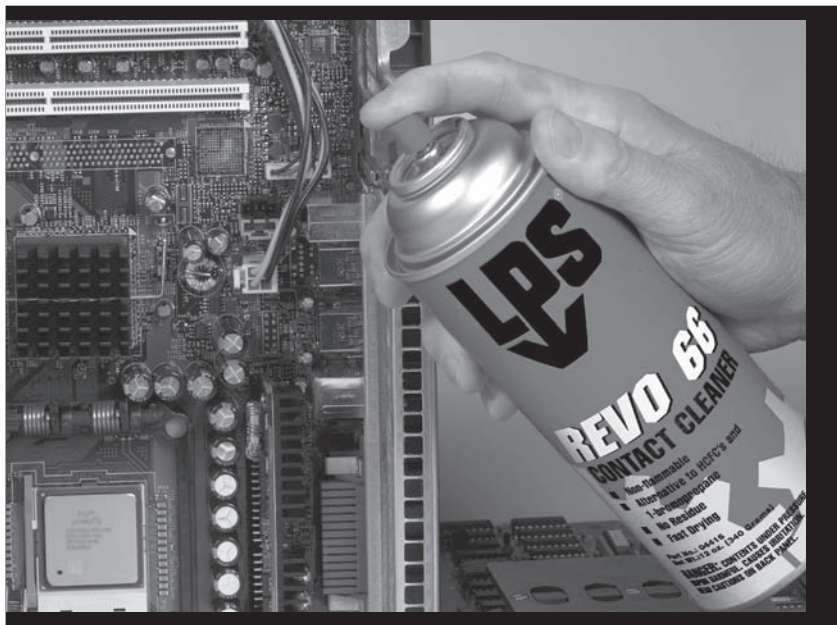

FEATURES

- Non-flammable precision cleaning
- Unique alternative to HCFC cleaners
- Does not contain brominated solvents
- Ideal for removing dirt, moisture, flux or oxides from the internal components of electronic equipment.
- Fast evaporation
- Non-conductive
- Quick penetration
- No rinsing and no residue
- Safe to use on most surfaces

APPLICATIONS

- Circuit Breakers
- Connectors
- Contacts
- Fluid systems
- Generators
- Office equipment
- Printed circuits
- Relays and controls
- Switches



PROPERTIES

Dielectric Strength (ASTM D-877):
47,500 Volts
Flash Point:
None
HMIS:
1, 1, 0
KB Value:
60

Propellant:
HFC 134-A
Specific Gravity (water=1):
1.304 @ 77°F (25°C)
VOC %:
63.4%

MATERIAL SAFETY DATA SHEETS AVAILABLE UPON REQUEST OR VISIT OUR WEB SITE : WWW.LPSLABS.COM

PACKAGE

Net Fill
12 ounce aerosol (340 grams)

Part No.
04416

LPS Laboratories • An Illinois Tool Works Company

P.O. Box 105052 • 4647 Hugh Howell Road • Tucker, GA 30085-5052 • TEL: (800) 241-8334 or (770) 243-8800 • FAX: (800) 543-1563 or (770) 243-8899

Internet Web Site: www.lpslabs.com

©2007 LPS Laboratories • LPS® is a registered trademark of Illinois Tool Works • Printed in U.S.A. • All Rights Reserved • Form #2226 • Rev. 4/2007